

MECHANICAL JACKS

CJ Series Rack Jacks

SIMPLEX



CJ15 & CJ100 Shown

Capacity Range► 1.65 - 11.13 tons

Stroke Range► 13.78 in.

Minimum Height Range► 28.54 in.

- Developed in accordance with the latest safety regulations.
- Suitable for lifting loads of any type.
- The jack is rated for full capacity at both the head and toe lifts.
- Lifting with either fixed toe or on clawed head.
- Low expenditure of force through optimal ratio.



FOLDING HANDLE


Safety crank with folding handle.



CE COMPLIANT

Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.

Here a CJ100 is used to position this cargo container for repair. Its solid base provides greater stability and more surface area. ▼

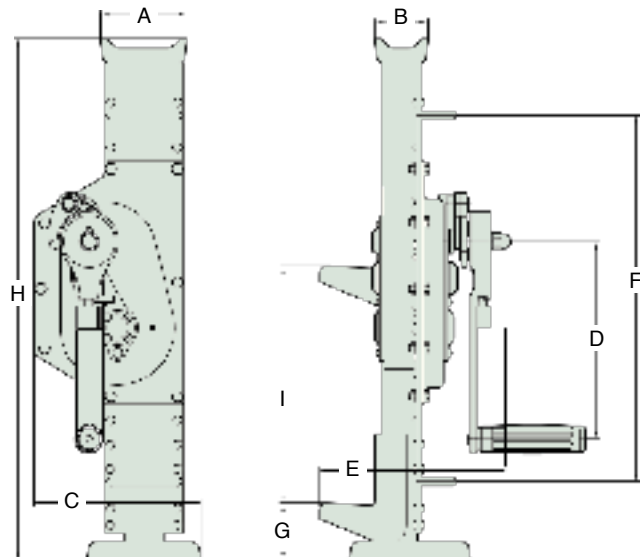

| Model | Head/Toe Capacity (tons) | Dimensions (in) | | | | | | | | | Weight (lbs) |
|--------------|--------------------------|-----------------|-------|-------|--------|-------|--------|--------|----------------|--------|--------------|
| | | A | B | C | D | E | F | G | H | I | |
| | | Width | Depth | Width | Length | Depth | Length | Height | Minimum Height | Stroke | |
| CJ15 | 1.65 | 3.54 | 1.97 | 5.94 | 9.84 | 7.95 | 20.67 | 2.56 | 28.54 | 13.78 | 29.76 |
| CJ30 | 3.31 | 3.94 | 1.97 | 8.03 | 9.84 | 8.39 | 20.67 | 2.76 | 28.54 | 13.78 | 48.50 |
| CJ50 | 5.51 | 4.33 | 2.68 | 8.31 | 9.84 | 9.29 | 20.67 | 2.76 | 28.54 | 13.78 | 61.72 |
| CJ100 | 11.13 | 5.51 | 2.76 | 10.12 | 11.81 | 11.69 | 23.23 | 3.15 | 31.50 | 13.78 | 101.41 |