



▼ ETT 400 Turntable

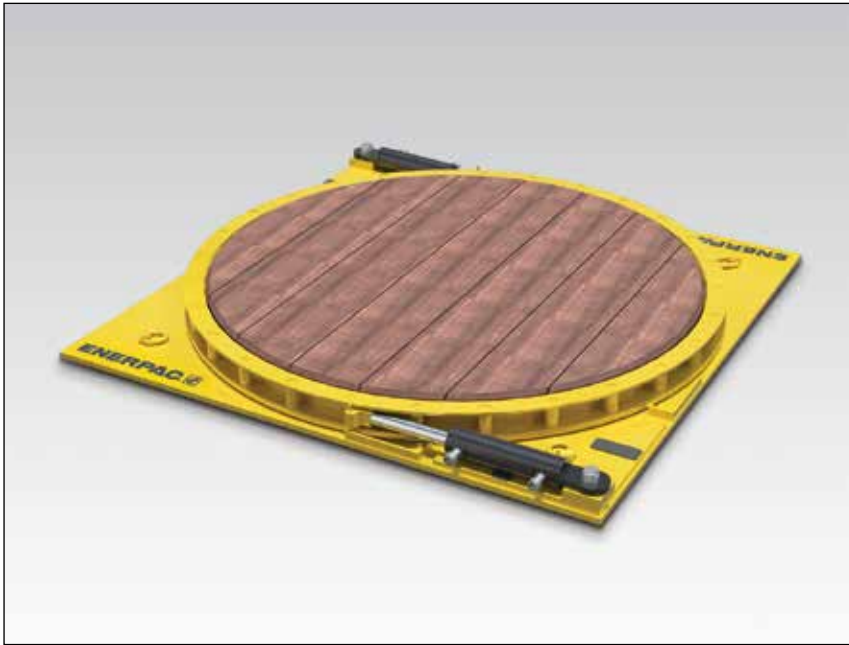

- Safe and controlled rotation of heavy loads
- Easily change rotation direction
- Dual capacity: 225 ton with one cylinder, 450 ton with two cylinders
- Compact size for use in applications with limited space
- Compatible with standard Enerpac pumps
- Hardwood surface

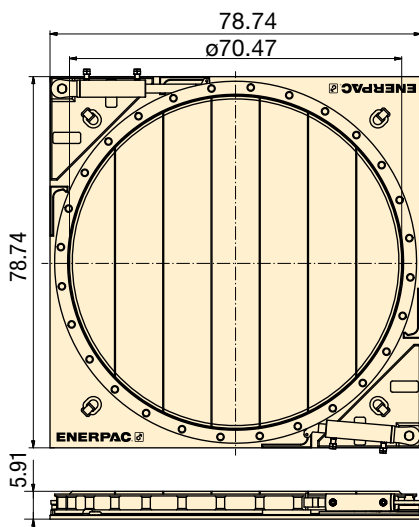

▼ SELECTION CHART

| Maximum Load Capacity | Model Number | Cylinder Capacity * | Cylinder Oil Capacity * (in ³) | | Number of Cylinders* | Rotation per Stroke | Platform Diameter | Wt. |
|-----------------------|---------------|---------------------|--|---------|----------------------|---------------------|-------------------|------|
| (ton) | | (ton) | advance | retract | | (degrees) | (in) | (lb) |
| 225 | ETT200 | 25 | 48.31 | 21 | 1 | 12.5 | 70.47 | 3748 |
| 450 | ETT400 | 25 | 48.31 | 21 | 2 | 12.5 | 70.47 | 3803 |

* Per cylinder. Cylinder model number: **BRD259-ETT**

ETT Series

Maximum Capacity:

225 - 450 tons

Cylinder Capacity:

25 tons

Maximum Operating Pressure:

10,000 psi



Safe and Controlled Rotation

The ETT-Series is your solution for rotating heavy loads during, before or after a lifting and skidding operation.



SFP-Series, Split-Flow Pump

Split-Flow pumps distribute an equal amount of hydraulic oil to a maximum of 8 outlets. Smart valve technology allows both controlled lifting and lowering of heavy loads.

Page: **132**



LH-Series, Low-Height Skidding

The ETT-Series is ideal in combination with our skidding systems, particular the LH-Series. Skidding and rotating in confined spaces is simplified.

Page: **360**



Telescopic Hydraulic Gantries

The ETT-Series in combination with our hydraulic gantry SL-Series makes load handling in the most demanding situations easy.

Page: **364**