

▼ 2 and 3-Jaw Hydraulic Lock-Grip Pullers





**The simple, safe and cost-effective way to remove shaft-mounted parts**

- Quickly and easily mount on a wide range of applications
- Hydraulically applied pulling force increases pulling capacity, reducing operator fatigue
- Lock-on jaws offer a secure grip for safe and easy operation
- Synchronous jaw movement enables entire pulling job to be performed by a single operator
- Available in 2 and 3-jaw configurations with or without a detachable hollow cylinder.



**Point Protector**

LGH-Series Pullers **MUST** be used with a point protector if the shaft end does not contain a drilled center hole. One point protector is included with every puller.

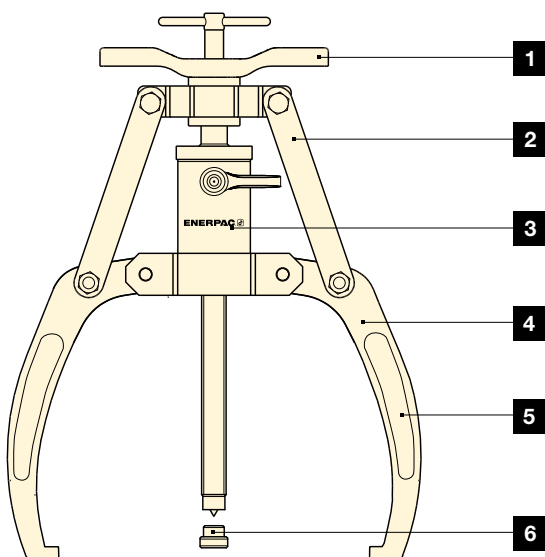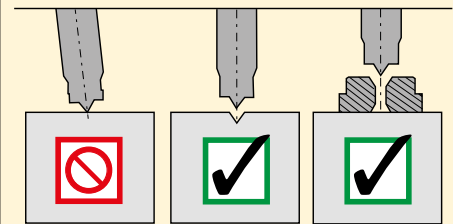

1. Convenient adjustment handle simplifies positioning of jaws on application and increases speed of operation.
2. Locking mechanism helps prevent jaws from slipping off application during pulling process.
3. Detachable hollow cylinder offers increased pulling capacity compared to mechanical alternatives.
4. Greater spreading width on jaws enables use on thicker objects.
5. Synchronous jaw movement increases ease of use, allowing one operator to mount the tool and perform the pulling application.
6. Point protector helps prevent damage to spindle when pulling against a flat surface.

# Hydraulic Lock-Grip Pullers



## LGH-Series, Lock-Grip Pullers

LGH-Series pullers provide the same safety and ease of use as their mechanical counterparts, with the pulling force applied by a standard 700 bar hydraulic cylinder.

LGH-Series pullers can apply up to 64 tons of force and are perfect for removing larger shaft-mounted objects up to 660 mm diameter.

Turning the puller handle locks the jaws onto the application, allowing the desired object to be pulled free when the spindle is turned.

## LGH Series



Puller Capacity:

**10 - 64 ton**

Maximum Reach:


**215 - 408 mm**

Maximum Spread:

**300 - 660 mm**

Maximum Operating Pressure:

**700 bar**

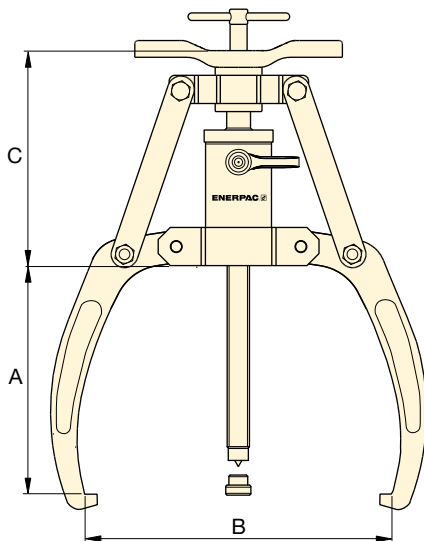

### IMPORTANT!

Always wear safety goggles and gloves while using pullers.



### Hydraulic Pullers

LGH-Series Hydraulic Pullers include puller and hydraulic cylinder.

### Hydraulic Puller Sets

LGHS-Series Hydraulic Pullers Sets include hydraulic puller, pump, gauge and HC7206C hydraulic hose.

Choose pump options below.

## ▼ SELECTION CHART

Hydraulic Puller Model Nr <sup>1)</sup>	Dimensions (mm)				Number of Jaws	Puller Capacity		Replacement Point Protector Part Number	Hydraulic Puller Sets Model Number			
	Max. Reach	Minimum Spread Diameter	Maximum Spread Diameter									
	A	B	B	C		US ton (kN)	(kg)		Hand Pump P392 Gauge Ass'y GA45GC	Air Pump XA11G Integrated Gauge	Electric Pump PUD1300E* Gauge G2535L	Cordless Pump XC1201ME* Gauge Ass'y GA45GC
<b>LGH210</b>	215	84	300	192	2	<b>10</b> (92)	10	<b>SGM0704</b>	—	—	—	—
<b>LGH310</b>	215	84	300	192	3	<b>10</b> (92)	13	<b>SGM0704</b>	<b>LGHS310H</b>	<b>LGHS310A</b>	<b>LGHS310EE *</b>	<b>LGHS310CE *</b>
<b>LGH214</b>	260	125	380	186	2	<b>14</b> (125)	14	<b>LGH14K6</b>	—	—	—	—
<b>LGH314</b>	260	125	380	186	3	<b>14</b> (125)	18	<b>LGH14K6</b>	<b>LGHS314H</b>	<b>LGHS314A</b>	<b>LGHS314EE *</b>	<b>LGHS314CE *</b>
<b>LGH224</b>	336	165	480	325	2	<b>24</b> (215)	37	<b>LGH24K6</b>	—	—	—	—
<b>LGH324</b>	336	165	480	325	3	<b>24</b> (215)	47	<b>LGH24K6</b>	<b>LGHS324H</b>	<b>LGHS324A</b>	<b>LGHS324EE *</b>	<b>LGHS324CE *</b>
<b>LGH253</b>	408	230	660	473	2	<b>53</b> (467)	111	<b>LGH253K6</b>	—	—	—	—
<b>LGH364</b>	408	230	660	473	3	<b>64</b> (576)	139	<b>LGH253K6</b>	<b>LGHS364H</b>	<b>LGHS364A</b>	<b>LGHS364EE *</b>	<b>LGHS364CE *</b>

<sup>1)</sup> Hydraulic puller models include cylinder. To receive puller without cylinder add "NC" after LGH (Example: **LGHNC210**).

\* E = for 230V applications. For 115V applications change last suffix from E into B. Example **LGHS310EB**.