Shown from left to right: ZE3304MBK, ZE4110DBFHR



- Features Z-Class high-efficiency pump design; higher oil flow and by-pass pressure, cooler running and requires 18% less current draw than comparable pumps
- Totally enclosed, fan-cooled industrial electric motors supply extended life and stand up to harsh industrial environments
- Low-voltage pendant, on certain models, provides additional safety for the operator
- Multiple valve and reservoir configurations provide application specific models to match the most demanding industrial applications
- High-strength, molded electrical enclosure protects electronics, power supplies and LCD readout from harsh industrial environments
- LCD readout on electric valve models provides a number of diagnostic and readout capabilities
- IP54 Rating for superior dust and water protection



■ Rail wheel pulling using RACH aluminum cylinder powered by ZE-Series pump.

# ZE **Series**



Reservoir Capacity:

1.2 - 10.3 gallon

Flow at Rated Pressure:

40 - 200 in<sup>3</sup>/min

Motor Size:

1.0 - 7.5 hp

Maximum Operating Pressure:

10,000 psi

# The Standard for **Industrial Applications**



### **Assisted Return Pumps with Venturi Valve Technology**

To improve productivity and plunger retraction, Enerpac offers valve configurations

designed to accelerate your cylinder retraction speeds, ZE-Series pumps feature Venturi Valve Technology to facilitate the faster return of single-acting gravity return cylinders. See valve type in ordering matrix and details in the "Directional Control Valve" section.

Page:

141



### **User Adjustable Relief Valve**

All VM and VE-Series have a user adjustable relief valve to allow the operator to easily

set the optimum working pressure.



#### **Locking Valves**


For applications requiring positive load holding, VM-Series valves (except VM32) are available with a


pilot-operated check valve. This provides hydraulic locking of the load until the valve is shifted into the retract position. To order this feature on your ZE-series pump see the valve type in the order matrix.

Page:

140

# **ZE-Series, Specifications and Dimensions**

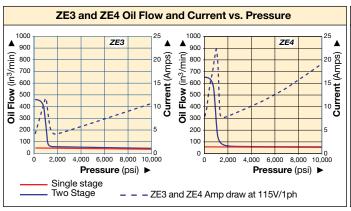

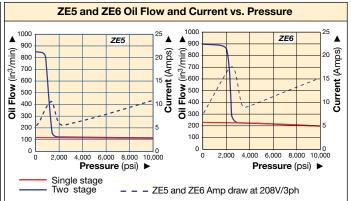


#### **▼ PERFORMANCE CHART**


Pump Series	Operation	C	output F (in³/	low Rat		Available Reservoir Sizes	Motor Size		Relief Valve Adjustment Range	Sound Level
		100 psi	700 psi	5,000 psi	10,000 psi	(gal)	hp	RPM	(psi)	(dBA)
750	Single-stage	43	43	42	40	F 0 10 0	4 0	1750	1000-10,000	75
ZE3	Two-stage	450	385	42	40		1.0		1000 10,000	75
754	Single-stage	64	64	62	60	1.2, 1.8, 2.6, 5.2, 10.3	1.5 17	1750	1000-10,000	75
ZE4	Two-stage	650	600	62	60			1700		
755	Single-stage	128	126	123	120		3.0	1750	1000-10,000	75
ZE5	Two-stage	850	825	123	120	2.6, 5.2, 10.3	3.0	1730		75
750	Single-stage	220	215	210	200	2.6, 5.2, 10.3	7.5	7.5 3450	1000-10,000	00
ZE6	Two-stage	900	890	210	200	2.0, 0.2, 10.0	7.5	0400	1000-10,000	80

Output flow rate is listed at 60 Hz. Flow rate will be approximately 5/6 of these values at 50 Hz.

# ZE-Series Pumps with 1.2 and 1.8 gallon reservoir

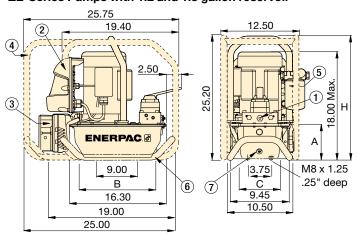

ZE-Series Pumps with 2.6, 5.2, 10.3 gallon reservoir

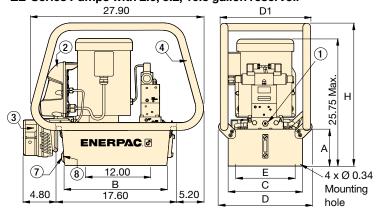

Single-Stage or **Two-Stage Pumps** 

Choose single-

stage pumps for applications that require constant flow regardless of pressure, such as testing or clamping.

Two-stage pumps have an increased output flow at low pressure to allow fast movement towards the load, for reduced cycle times and increased productivity.

- 1) User-adjustable relief valve on all manual and solenoid valves:
  - 3/8" NPTF on A and B ports 1/4" NPTF on auxiliary ports
- (2) Electric Box
- 3 Heat Exchanger
- (4) Roll Bar
- ⑤ Return Line Filter
- (6) Skid Bar
- 7 Oil Drain
- (8) Oil Level/Temperature Switch

Reservoir Capacity	ZE-Series Pump Dimensions (in)								
(gal)	A	.,							
1.2	5.6	11.0	6.0	_	_	_	20.2		
1.8	5.6	11.0	8.1	-	-	_	20.2		
2.6	6.2	16.5	12.0	15.1	14.6	11.0	23.6		
5.2	7.1	16.5	16.6	19.7	19.2	15.6	24.6		
10.3	10.6	15.7	19.9	22.7	22.5	18.9	28.1		

# **ZE-Series Ordering Guide**

# ENERPAC 3

### ▼ STEP 1: Select a Pump from the Pump Ordering Matrix.

Type

The functionality of the pump can be determined by the model number. Utilize the guide below to select the best pump for the application from the pump matrix.



**Capacity Operation** 

Type 1 Product Type

= Pump Class

Type

2 Motor Type

= Induction Electric Motor

Group

3 Flow Group

= 40 in<sup>3</sup>/min @ 10,000 psi = 60 in<sup>3</sup>/min @ 10,000 psi = 120 in<sup>3</sup>/min @ 10,000 psi

= 200 in<sup>3</sup>/min @ 10,000 psi

4 Valve Types

= No valve w/cover plate

= Dump (VE32D)

= 3-way/2-position manual (VM32)

3 = 3-way/3-position manual or electric (VM33 or VE33)

= 4-way/3-position manual or electric (VM43 or VE43)

= 3-way/3-position locking manual w/po check (VM33L)

= 3-way/2-position manual (VM22)

8 = 4-way/3-position locking manual w/po check (VM43L)

= 3-way/3-position manual, Venturi-Valve (VM33VAC) 6)

11 = 3-way/3-position electric, Venturi-Valve (VE33VAC) 6) 5 Reservoir Capacity

**04** = 1.2 gallon \* = 1.8 gallon \*

10 = 2.6 gallon 20 = 5.2 gallon

40 = 10.3 gallon

\* not available on ZE5 or ZE6

Accessories

6 Valve Operation

= Dump valve

(w/ pendant and LCD) Manual valve

(w/o pendant, w/ LCD)

Manual valve 3) М (w/o pendant or LCD)

No valve 3)

(no electrical box) Solenoid valve

(w/ pendant and LCD)

7 Voltage

Single Phase (not on ZE5 or ZE6)

 $= 115V 1 ph 50-60Hz^{1}$ 208-240V 1 ph 50-60 Hz

European Plug

= 208-240V 1 ph 50-60 Hz **USA Plug** 

Three Phase 3)

= 208-240V 3ph 50-60Hz J = 460-480V 3ph 50-60Hz

= 380-415V 3ph 50-60Hz

#### ▼ STEP 2: Factory Installed Accessories

Select factory installed accessories and add to the pump model number after the hyphen. The example above shows that a Return Line Filter (F) and Heat Exchanger (H) have been added to the pump.

8 Factory installed accessories include the following:

**F** = Return Line Filter  $G = 0-15,000 \text{ psi gauge } (2^{1}/2^{1})^{4}$ 

н = Heat exchanger <sup>2)</sup> Κ Skid bar (1.2 and 1.8 gal.

reservoirs only)

= Level/temperature switch 2)

**N** = No reservoir handles (includes lifting eyes) 7)

R = Roll cage = Single stage 5) S

= Pressure transducer 2) 4)

U = Foot switch 2)

1) 115-volt pumps are supplied with 15-amp plug for intermittent use. 20-amp circuit recommended for frequent full pressure use.

2) These accessories require LCD electrical package. Pressure switch option only available on manual valves without locking valve. The LCD electrical package can accept either a pressure switch or pressure transducer, but not both.

3) Standard Electric models with 3-phase motors without electric boxes are shipped without cord, motor starter or overload protection.

4) Pressure gauge not available on pump models with pressure transducer. Pressure transducer provides digital pressure readout on LCD display.

5) Not available on Valve Types 10, 11

6) Not available on ZE3

7) Lifting eyes (N) not available on reservoir capacities 04 or 08.

### ▼ ZE-SERIES PUMP MODELS

No Valve with coverplate, no electric box

#### Manual Valve without electric box or LCD

- Ideal choice for most applications
- · Manual valve control, for both single-acting or doubleacting applications
- Venturi Valve Technology (VM33VAC) for faster retract of single-acting cylinders
- Manual motor control
- On/off switch on 1-phase electric motor

### Solenoid Dump Valve with electric box and LCD

- · Ideal for punching, crimping and cutting
- · For use when load holding is not required
- Push-button control pendant with 10-ft. cord controls the valve and motor

#### Solenoid 3-position Valve with Electric Box

- · Ideal for production and lifting applications
- · All valves are 3-position for Advance-Hold-Retract
- Venturi Valve Technology (VE33VAC) for faster retract of single-acting cylinders
- Push-button control pendant with 10-ft. cord controls the valve and motor

114 www.enerpac.com


# **ZE-Series Pump Ordering Matrix**

S/A	Hold	Valve	Reservoir	ZE3 Series (1.0 hp)		ZE4 Series (1.5 hp)		ZE5 Series (3.0 hp)		ZE6 Series (7.5 hp)	
or D/A 1) Type 2) Capacity Output Flow Rate at			Output Flow Rate at		Output Flow Rate at		Output Flow Rate at				
<i>D/A '/</i>				10,000 psi: 40 in³/mir <b>Model</b>	Wt.	10,000 psi: 60 in <sup>3</sup> /min	Wt.	10,000 psi: 120 in³/r <b>Model</b>	nin Wt.	10,000 psi: 200 in <sup>3</sup> /	/min Wt.
			(gal)	Number 3)	(lbs)	Number 3)	(lbs)	Number <sup>3)</sup>	(lbs)	Number <sup>3)</sup>	(lbs)
			1.8	ZE3008NB (I, E, W, J, G)	99	ZE4008NB (I, E, W, J, G)	95				
			2.6	ZE3010NB (I, E, W, J, G)	99	ZE4010NB (I, E, W, J, G)	108	ZE5010NW (J, G)	119	<b>ZE6010NW</b> (J, G)	158
			5.2	ZE3020NB (I, E, W, J, G)	126	ZE4020NB (I, E, W, J, G)	135		146	<b>ZE6020NW</b> (J, G)	185
			10.3	ZE3040NB (I, E, W, J, G)	177	<b>ZE4040NB</b> (I, E, W, J, G)	186	ZE5040NW (J, G)	197	<b>ZE6040NW (J, G)</b>	236
S/A		VM22	5.2			ZE4720MB (E, W)	143				
S/A		VM32	1.2	ZE3204MB (E)	85						
S/A		VM32	1.8	ZE3208MB (I, E, W, J, G)	91						
S/A		VM32	2.6	ZE3210MB (I, E, W, J, G)	104			ZE5210MW (J, G)	124	ZE6210MW (J, G)	
S/A		VM32	5.2	ZE3220MB (I, E, W, J, G)	131	ZE4220MB (I, E, W, J, G)	140	ZE5220MW (J, G)	151	ZE6220MW (J, G)	190
S/A	•	VM33	1.2	ZE3304MB (E)	86						
S/A	•	VM33	1.8	ZE3308MB (I, E, W, J, G)	92			7550401014 (1.0)	405	75004011111/1.0	101
S/A	•	VM33	2.6	ZE3310MB (I, E, W, J, G)	105			ZE5310MW (J, G)	125	ZE6310MW (J, G)	
S/A	•	VM33	5.2	ZE3320MB (I, E, W, J, G)	132	ZE4320MB (I, E, W, J, G)		ZE5320MW (J, G)	152	ZE6320MW (J, G)	
S/A	•	VM33	10.3	ZE3340MB (I, E, W, J, G)	183	ZE4340MB (I, E, W, J, G)		ZE5340MW (J, G)	203	ZE6340MW (J, G)	242
S/A	•	VM33VAC	1.8 5.2			ZE41008MB (I, E, W, J, G)	101	7EE1020MW (   C)	150	7EC1020MW / L C\	100
S/A	•	VM33VAC				ZE41020MB (I, E, W, J, G)	141	ZE51020MW (J, G) ZE51040MW (J, G)	153	ZE61020MW (J, G) ZE61040MW (J, G)	
S/A	•	VM33VAC	10.3	750000HD // 5 W / 0	00			ZESTU4UNIN (J, U)	203	ZEOTU4UIVIW (J, G)	242
S/A S/A	•	VM33L VM33L	5.2	ZE3608MB (I, E, W, J, G)	92 136	ZE4620MB (I, E, W, J, G)	1 1 E				
S/A	•	VM33L	10.3	ZE3620MB (I, E, W, J, G)	187	** * * * *	145 196				
D/A	•	VM43	1.2	ZE3640MB (I, E, W, J, G)	86	ZE4040IVID (I, E, VV, J, U)	190				
D/A D/A	•	VM43	1.8	ZE3404MB (E)	92	ZE4408MB (I, E, W, J, G)	101				
D/A D/A	•	VM43		ZE3408MB (I, E, W, J, G)	106			ZE5410MW (J, G)	125	ZE6410MW (J, G)	164
D/A	•	VM43	5.2	ZE3410MB (I, E, W, J, G) ZE3420MB (I, E, W, J, G)	132			ZE5420MW (J, G)	152	ZE6420MW (J, G)	191
D/A	•	VM43	10.3	ZE3440MB (I, E, W, J, G)	183			ZE5440MW (J, G)	203	ZE6440MW (J, G)	242
D/A	•	VM43L	1.8	ZE3808MB (I, E, W, J, G)	96	224440MD (1, 2, 11, 0, 0)	132	2201101111 (0, 0)	200	ZEOTTOMIT (0, u)	242
D/A	•	VM43L	5.2	ZE3820MB (I, E, W, J, G)	136	ZE4820MB (I, E, W, J, G)	145	ZE5820MW (J, G)	156	ZE6820MW (J, G)	195
D/A	•	VM43L	10.3	ZE3840MB (I, E, W, J, G)	187			ZE5840MW (J, G)	207	ZE6840MW (J, G)	
S/A		VE32D	1.2	ZE3104DB (I, E, W, J, G)	94		100	(0,0)			
S/A		VE32D	1.8	ZE3108DB (I, E, W, J, G)	100	ZE4108DB (I, E, W, J, G)	109				
S/A		VE32D	2.6	ZE3110DB (I, E, W, J, G)	114			ZE5110DW (J, G)	136	ZE6110DW (J, G)	175
S/A		VE32D	5.2	ZE3120DB (I, E, W, J, G)				ZE5120DW (J, G)	163	ZE6120DW (J, G)	
S/A		VE32D	10.3			ZE4140DB (I, E, W, J, G)		,	213	ZE6140DW (J, G)	
S/A	•	VE33	1.2	ZE3304SB (I, E, W, J, G)	106	,,,,,,,		, , ,		, , ,	
S/A	•	VE33	1.8	ZE3308SB (I, E, W, J, G)	112	ZE4308SB (I, E, W, J, G)	121				
S/A	•	VE33	2.6	ZE3310SB (I, E, W, J, G)	125	ZE4310SB (I, E, W, J, G)		ZE5310SW (J, G)	148	ZE6310SW (J, G)	186
S/A	•	VE33	5.2	ZE3320SB (I, E, W, J, G)	152	ZE4320SB (I, E, W, J, G)	161	ZE5320SW (J, G)	174	ZE6320SW (J, G)	213
S/A	•	VE33	10.3	ZE3340SB (I, E, W, J, G)	203	ZE4340SB (I, E, W, J, G)	212	ZE5340SW (J, G)	225	ZE6340SW (J, G)	264
S/A	•	VE33VAC	1.8	1,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		ZE41108SB (I, E, W, J, G)	115				
S/A	•	VE33VAC	5.2			ZE41120SB (I, E, W, J, G)	155	ZE51120SW (J, G)	168	ZE61120SW (J, G)	207
S/A	•	VE33VAC	10.3					ZE51140SW (J, G)	219	ZE61140SW (J, G)	258
D/A	•	VE43	1.2	ZE3404SB (I, E, W, J, G)	106						
D/A	•	VE43	1.8	ZE3408SB (I, E, W, J, G)	112	ZE4408SB (I, E, W, J, G)	121				
D/A	•	VE43	2.6	ZE3410SB (I, E, W, J, G)	125	ZE4410SB (I, E, W, J, G)	134	ZE5410SW (J, G)	148	ZE6410SW (J, G)	186
D/A	•	VE43	5.2	ZE3420SB (I, E, W, J, G)	152	ZE4420SB (I, E, W, J, G)	161	ZE5420SW (J, G)	174	ZE6420SW (J, G)	213
D/A	•	VE43	10.3	ZE3440SB (I, E, W, J, G)	203	ZE4440SB (I, E, W, J, G)	212	ZE5440SW (J, G)	225	ZE6440SW (J, G)	264

<sup>1)</sup> S/A = Single acting / D/A = Double acting

Other voltages available as shown. Replace "B" voltage suffix with selected voltage character. Model number order example: ZE4108DI is 208-240V, 1 phase, 50/60 Hz. See Ordering Guide page for voltage descriptions

Note: Voltage options K (440V, 3-phase, 50/60HZ) and R (575V, 3-phase, 60 Hz) are available on select models. Contact your local representative for availability.



<sup>2)</sup> See Valve Section for technical information.

<sup>3) &</sup>quot;B" suffix model numbers shown are 115 VAC, 1-phase, 50/60 Hz



# Electric Box 1)

- Back-lit LCD
- Pump usage information, hour and cycle counts
- · Low-voltage warning and recording
- · Self-test and diagnostic capabilities
- Pressure read-out 2)
- Auto-mode pressure setting 2)
- Information can be displayed in six languages 3)
- 1) Included on pumps with solenoid valves
- 2) When used with pressure transducer
- 3) English, French, German, Italian, Spanish and Portuguese



# Level/Temperature Switch 4)

- Shuts down pump before oil level reaches an unsafe level, avoiding damage due to cavitation
- · Shuts down pump when unsafe oil temperature is reached
- Ideal if pump is used in remote area without visual access to oil level
- 4) 24V, requires Electric Box. Available for 2.6, 5.2 and 10.3 gallon reservoirs

Communication

## **Return Line Filter**

- 25 micron nominal filter removes contaminants from return oil flow before allowing it back into tank
- Internal by-pass valve prevents damage if filter is dirty
- With maintenance indicator
- Replaceable filter element PF25

Accessory Kit Model Number	Fixed Temperature Signal	Operating Tempera- ture	Max. Pressure		
	(° F)	(° F)	(psi)		
ZLS-U4	75	40 - 230	150		

Accessory Kit Model Number	Maximum Pressure	Maximum Oil Flow	By-pass Setting
	(psi)	(GPM)	(psi)
ZPF	200	12.0	25



# Roll Cage

- For easy portability
- Protects pump and electric box
- Available for all reservoir sizes

Accessory Kit Number	Fits on Reservoir	
ZRC-04	1.2 and 1.8 gallon <sup>1)</sup>	
ZRC0-4H	1.2 and 1.8 gallon <sup>2)</sup>	
ZRB-10	2.6 gallon	
ZRB-20	5.2 gallon	
ZRB-40	10.3 gallon	

1) Without heat exchanger

2) With heat exchanger



### Skid Bar

- Provides easy two-hand lift
- Provides greater pump stability on soft or uneven surfaces

Kit	For ZE-Series Pumps with Reservoir	
Number		(lbs)
SBZ-4	1.2 & 1.8 gal. w/o heat exchanger	4.9
SBZ-4L	1.2 & 1.8 gal. with heat exchanger	5.5



# Foot Switch 5)

- Hands-free remote control on solenoid dump and 3-position valves
- With 10-foot cord
- 5) 15V, requires Electric Box

ory r	with Reservoir			Can be used on ZE-Series
	1.2 & 1.8 gal. w/o heat exchanger	4.9	Kit Nullibei	Fullips with
L	1.2 & 1.8 gal. with heat exchanger	5.5	ZCF-2	Solenoid VE-Series valves

116 www.enerpac.com

# **ZE-Series Accessories**



# Pressure Transducer 1)

- Displays pressure on LCD in bar. MPa or psi
- More accurate than analog gauge
- · Calibration can be fine-tuned for certification
- Easy-viewing variable rate display
- · "Set pressure" feature turns off motor at user defined pressure (or shifts valve to neutral on models with VE33/ VE43 valves)
- 1) 24V, requires Electric Box

,			
Accessory	Adjustable	Switch-	Dead-
Kit	Pressure	point	band
Model	Range	Repeat-	
number	(psi)	ability	(psi)
7PT-114	50-10 000	+ 0.5%	50



# Heat Exchanger 5)

- Removes heat from bypass oil to provide cooler operation
- Stabilizes oil viscosity, increasing oil life, and reduces wear of pump and other hydraulic components
- 5) 24V DC, requires electric box

Accessory Kit Model number	Fits on Reservoir	Weight (lbs)
ZHE-E04	1.2 and 1.8 gallon	9.0
ZHE-E10	2.6, 5.2 and 10.3 gallon	9.0



# Pressure Switch 2) 3) 4)

- · Controls pump, monitors system
- Adjustable pressure 500-10,000 psi
- Includes glycerin filled, 15,000 psi pressure gauge, G2536L
- Accuracy ± 1.5% of full scale
- 2) 24V, requires Electric Box. Not available in combination with pressure transducer.
- 3) Not available on LCD electronics
- 4) Only available on locking valves without pressure transducer

Accessory	Switch-	Deadband	Oil
Kit	point		Ports
Model	Repeat-		
number	ability	(psi)	(NPT)
ZPS-E3	± 2%	115-550	3/8"



### Pressure Gauge (G)

- . Minimize risk of overloading to ensure long life of equipment
- 2.5" face diameter, glycerin filled
- · Dual Scale, PSI and Bar

Note: Pressure Gauge not available on pump models with pressure transducer. The pressure transducer provides digital pressure read-out on LCD-display.

Model No.	Description
G2536L	15,000 psi, Ø 2.5 inches





Reservoir Capacity:

1.2 - 10.3 gallon

Flow at Rated Pressure:

40 - 200 in<sup>3</sup>/min

Motor Size:

1.0 - 7.5 hp

Maximum Operating Pressure:

10,000 psi

#### **ZPT-U4 Pressure Transducer**

More durable against mechanical and hydraulic shock than analog gauges.

- Digital pressure read-out provides accuracy of 5% of full scale.
- Easy-viewing variable rate display automatically varies increments between 44, 203, 508 and 2103 psi as rate of pressure change increases.
- "Set pressure" feature turns off motor at user defined pressure (or shifts valve to neutral on VE33 and VE43 valves).



#### **ZHE-Series Heat Exchangers**

Heat exchanger stabilizes oil temperature at 130° F at 70° F ambient temperature. Thermal

transfer at 5 GPM and 70° F ambient temperature: 900 Btu/hour.

Do not exceed maximum oil flow of 7.0 GPM and maximum pressure of 300 psi. Not suitable for water-glycol or high water based fluids.